

[www.GESecurity.com](http://www.GESecurity.com)

## **ProBridge 3 Gateway**

### **Overview**

The ProBridge 3 (PB3) Gateway is a translator device that acts as a router between a network that uses zone addressing and a network that uses direct camera addressing.

### **Outstanding Features**

The PB3 Gateway is easily programmable from a PC using with Windows HyperTerminal software. With PB3 Gateway, dome cameras can be easily assigned to multiplexers/DVMRe products. The programming mode permits complete flexibility in camera mapping.

In the operating mode, the PB3 Gateway ensures that telemetry messages, originating from multiplexers/DVMRe products, will be correctly addressed to the intended dome.



### **Standard Features**

- **Converts telemetry protocol to properly address dome cameras located in a Digiplex® environment**
- **Allows WaveReader™ users to control domes connected to Digiplex switches**
- **Easily programmable using Windows HyperTerminal software**



# ProBridge 3 Gateway

## Specifications

### Mechanical

- Construction: Black anodized aluminum
- Dimensions: 1 in H x 4.25 in W x 7 in L (25 mm x 108 mm x 178 mm)
- Nominal weight: 4.8 oz (136 g)
- Shipping weight: 1 lb (0.45 kg) packaged, includes power supply, cables, and manual

### Cables Included

- 1 PB3 to DVMRe-CT cable: RJ45 to RJ45
- 1 PB3 to DVMRe-CS/CD cable: RJ45 to DB9F (or programming via Windows HyperTerminal)
- 1 PB3 to wiring box : RJ45 to Flying Lead


### Environmental

- Operating temperature: 32° to 104° F (0° to 40° C)
- Relative humidity: 90 percent, noncondensing

### External AC Power Supply (included)

- Input voltage: 110 or 240 VAC  $\pm$  10%
- Input power: 20 W
- Output rating: 12 VDC
- Output current: 1 A
- DC power connector: DC jack, positive center pin
- PB3 current: 110 mA

## Related Diagram

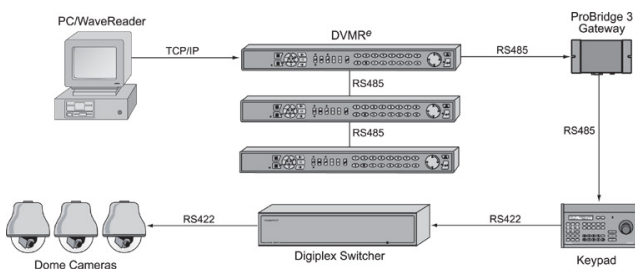

## Ordering Information

**CBR-PB3-GW**



Mailing Address  
4575 Research Way, STE 250  
Corvallis, OR 97333 USA  
www.GESecurity.com

Americas  
800-469-1676 (US only)  
tel 541-754-9133  
fax 541-754-7162

Asia  
tel 852-2907-8108  
fax 852-2142-5063  
  
Australia  
tel 61-3-9259-4700  
fax 61-3-9259-4799

Europe  
tel 32-2-725-11-20  
fax 32-2-721-86-13  
  
Latin America  
tel 305-267-4301  
fax 305-267-4300

www.GESecurity.com