

www.GESecurity.com

KTD-415 Preset Alarm Interface

Overview


The KTD-415 initiates local call-up of up to 16 preset positions on a CyberDome® or other compatible PTZ (pan/tilt/zoom) receiver with preset positioning capability.

Outstanding Features

Each of the KTD-415's 16 dry contact connections corresponds to preset positions 0 through 15 on a PTZ receiver. Each preset consists of a pan, tilt, zoom, and focus position. The KTD-415 can operate with receivers addressed 0 through 63. The receiver's address is set on the unit's programmable DIP switch.

The KTD-415 features a dry-contact output relay that activates when one or more preset alarm contacts is closed. This dry contact output can be fed to a KTD-463 alarm system or a KTD-348 alarm interface, providing video call-up and site annunciation to the keypad operator.

For custom applications, the KTD-415 can be configured to provide PTZ control of a GE Security PTZ receiver through dry contacts.

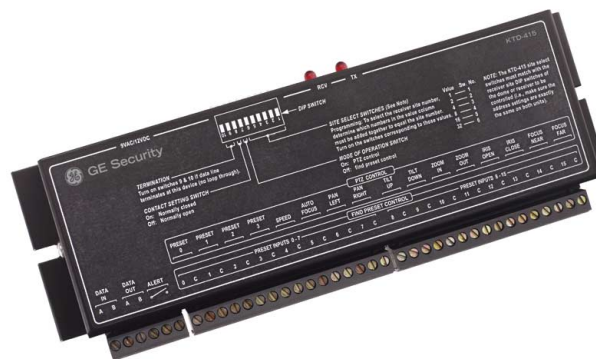

Standard Features

- **16 dry contact connections**
- **Automatic call-up of presets 0 to 15**
- **Site addressable**
- **Output relay for alarm interface**
- **Custom PTZ control**
- **Removable terminal strip**
- **Compact: 9 x 3.15 x 1.11 inches**
- **Wall mountable**
- **Easy to install**
- **Economical**



KTD-415

Preset Alarm Interface

Specifications

Electrical

- Input voltage: 9 VAC/12 VDC
- Input power: 1.5 VA
- Input data: RS422
- Alarm inputs: Dry contacts or voltage source with ability to sink 3.5 mA current
- Output data: RS422
- Alarm output relay: 1 A @ 35 VDC

Connections

- RS422 in/out: 6-pin removable terminal strip
- Alarm contacts: Two 16-pin removable terminal strips
- Auxiliary relay: 6-pin removable terminal strip
- 9 VAC power: 5 mm DC jack


Mechanical

- Weight: 11.2 oz (318 g)
- Construction: 0.050 in (1.27 mm) aluminum
- Finish: Black anodized

PTZ Control (DIP Switch Selectable)

- Contact GE Security for details on the following:
- Call Presets 0 to 3; Speed; Auto Focus; Pan Left; Tilt Up; Tilt Down; Zoom In; Zoom Out; Iris Open; Iris Close; Focus Near; Focus Far

Related Diagram

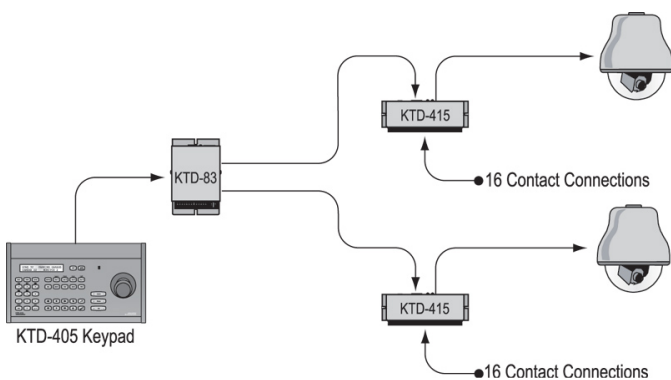

Ordering Information

KTD-415	
Blank	Preset Alarm Interface
U	Preset Alarm Interface w/Universal Transformer



Mailing Address
4575 Research Way, STE 250
Corvallis, OR 97333 USA
www.GESecurity.com

Americas
800-469-1676 (US only)
tel 541-754-9133
fax 541-754-7162

Asia
tel 852-2907-8108
fax 852-2142-5063

Australia
tel 61-3-9259-4700
fax 61-3-9259-4799

Europe
tel 32-2-725-11-20
fax 32-2-721-86-13

Latin America
tel 305-267-4301
fax 305-267-4300

www.GESecurity.com